

Eaton 5L UPS

650/850/1200VA




1200VA

650VA / 850VA

Ideal for protecting:

- PC and workstations
- Network-attached storage
- Internet access point
- Point of sales equipment
- Business telephony

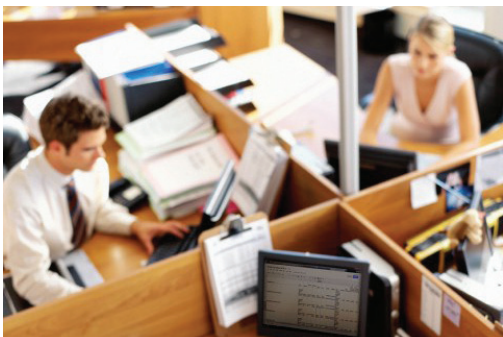

Line interactive UPS

Line interactive technology at an affordable price

- Secure your data and equipment by protecting you against power outages and bad power quality
- With Automatic Voltage Regulation (AVR), Eaton 5L UPS can ride through under & over voltage without utilizing battery
- Unmatched price/performance ratio

Eaton reliability

- Rely on batteries anytime : Eaton 5L UPS can start up on batteries without mains (Cold Start)
- Eaton 5L UPS is equipped with data line surge protection (internet/fax) to avoid back door damages coming through phone lines
- Ensure piece of mind with 2 years warranty


Easy integration

- Ease of connection to any equipment (PC, HD TV, internet gateway) with universal outlets
- Install Eaton 5L UPS anywhere thanks to its small size
- Manage your UPS from your PC:
 - Shutdown software compatible with most OS for safe system shutdown and easy monitoring of UPS condition
 - UPS comes equipped with USB port and USB communication cable



Powering Business Worldwide

Eaton 5L UPS

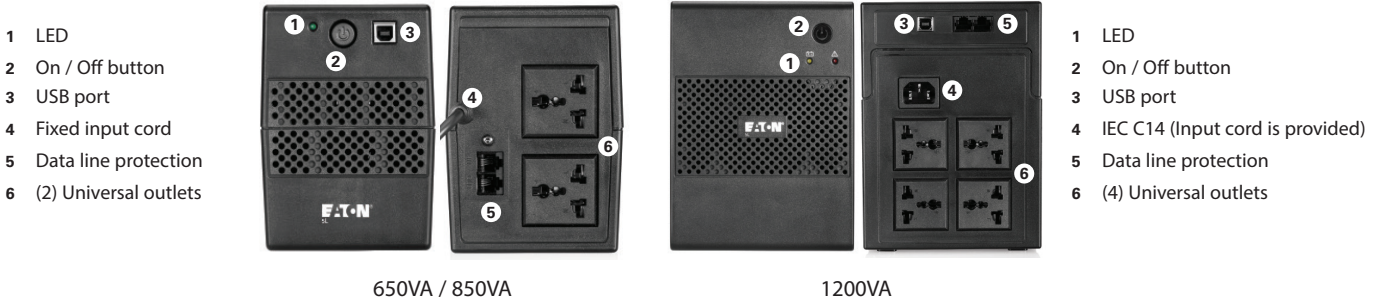

| Technical specifications | 650 USB | 850 USB | 1200 USB |
|--|--|--|-----------------|
| Rating (VA/W) | 650VA/360W | 850VA/480W | 1200VA/600W |
| Format | Tower | | |
| Electrical characteristics | | | |
| Technology | Line interactive | | |
| Input voltage ranges without using batteries | 160V - 290V | | |
| Output voltage | 230V | | |
| Output frequency | Auto sensing, 50Hz default | | |
| Data line surge protection (internet/tel/fax) | Yes | | |
| Connections | | | |
| Input | BS1363 fixed cord | IEC C14 (Input cord IEC C13 - BS1363 is provided) | |
| Outputs | (2) Universal Outlets | (4) Universal Outlets | |
| Batteries | | | |
| Typical backup times for 1 PC* | 16 min | 20 min | 30 min |
| Typical backup times for 2 PC* | 5 min | 6 min | 11 min |
| Typical backup times for 3 PC* | 1 min | 2 min | 7 min |
| Battery management | Permanent battery recharge, cold start | | |
| Power management | | | |
| Communication ports | USB port | | |
| Software | Winpower | | |
| Operating conditions, standards and approvals | | | |
| Operating temperature | 0-40°C | | |
| Noise level | <40db | | |
| Regulations | EN62040-2, EN61000-4 | | |
| Dimensions D x H x W / Weight | | | |
| Dimensions (mm) | 278 x 100 x 140 | | 359 x 139 x 191 |
| Weight (kg) | 4.3 | 5.1 | 8.9 |
| Customer service & support | | | |
| Warranty | 2 years | | |

* Backup times are approximate and may vary with equipment, configuration, battery age, temperature, etc.

Authorized Distributor & Qualified Service Partner:

PT. Deltasindo Raya Sejahtera

Tel (021) 2922 6688
Fax (021) 2922 6699
sales@deltasindo.com
www.deltasindo.com

Eaton is the trade name, trademark, and/or service mark of Eaton Corporation or its subsidiaries and affiliates.