

# PERFORMANCE PRO SERIES HP2B1



## 2MP Network Bullet IR Camera



### OPERATIONAL

Video Standard	PAL/NTSC
Image Sensor	1/2.8" CMOS
Number Of Pixels (H x V)	1920(H) x 1080(V)
Minimum Illumination	0.0035 lux@F1.2, AGC ON 0 lux with IR ON
S/N Ratio	> 50 dB
Electronic Shutter Speed	1s ~ 1/ 100,000s
IR Distance	Up to 20 – 30 m, depending on scene reflectance
Day/Night	Auto/Day/Night/Timing
Backlight Compensation	BLC, HLC
White Balance	Auto/Indoor/Outdoor/Manual
Wide Dynamic Range	Digital WDR
Noise Reduction	3D DNR
Privacy Masking	Off / On (4 Areas)
Motion Detection	Support
Region Of Interest	Support (3)
Lens	3.6 mm, Fixed
Angle Of View	H: 87.3°, V: 56.5°
Audio	1 In
VIDEO	
Video Compression	H.265 / H.264
Resolution	1080P(1920x1080), 720P(1280x720), D1(704x576), CIF(352x288), 480x240
Frame Rate	Main stream: 1080P/720P (1~25/30fps) Sub stream: D1/CIF (1~25/30fps) Third stream: D1/CIF/480x240 (1~25/30fps)
Bit Rate Control	CBR / VBR
Bit Rate	64 Kbps ~ 6 Mbps

### NETWORK

Ethernet	10/100 Base-T Ethernet (RJ-45)
Supported Web Browsers	Internet Explorer 11.0+
Supported OS	Microsoft Windows 7/10
Interoperability	ONVIF Profile S, G
Protocols*	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP, IGMP, SMTP, DHCP, NTP, DNS, DDNS, QoS, 802.1X, UDP, ICMP, ARP, TLS
Maximum Users Access	3 Users
Security	User account and password protection, HTTPS, IP Filter, TLS1.2,AES-128
Micro SD	Micro SD/SDHC/SDXC card slot (128GB)

### ELECTRICAL

Power Supply	DC12V, PoE (IEEE 802.3af) (Class 3)
Power Consumption	Max 5W

### MECHANICAL

Dimensions	167.5mm x 74.5mm x 74.5mm
Product Weight	0.39kg
Material	Metal housing with coating

### ENVIRONMENTAL

Operating Temperature	-30°C ~ 60°C (-22°F ~ 140°F)
Relative Humidity	Less than 95%, non-condensing
Ingress Protection	IP67


### REGULATORY

Certification	CE, FCC, RoHS
---------------	---------------

\*Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

# PERFORMANCE PRO SERIES HP2B1

## DIMENSIONS

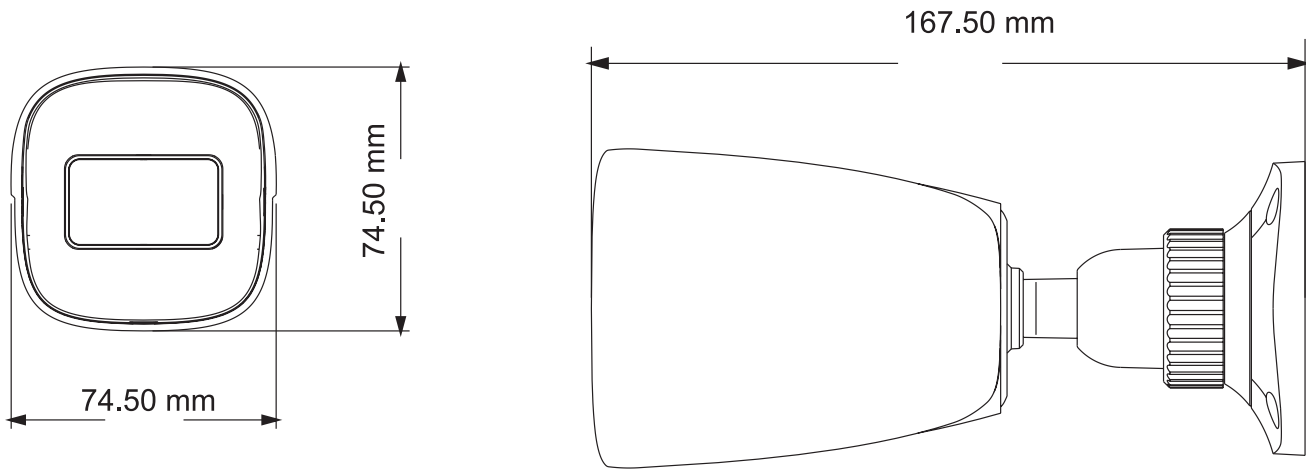

## ORDERING

PART CODE NO	DESCRIPTION
HP2B1	2MP Network Bullet IR Camera, TDN, 1/2.8" CMOS, 3.6mm, H.265, PoE, IP67

### PT Deltasindo Raya Sejahtera

Tel (021) 2922 6688  
Fax (021) 2922 6699  
honeywell@deltasindo.com  
www.deltasindo.com

**Honeywell**